




cDAQ-SV1100 Bundle

CompactDAQ Sound and Vibration Bundle

Datasheet and Specifications

cDAQ-9171 and NI-9231

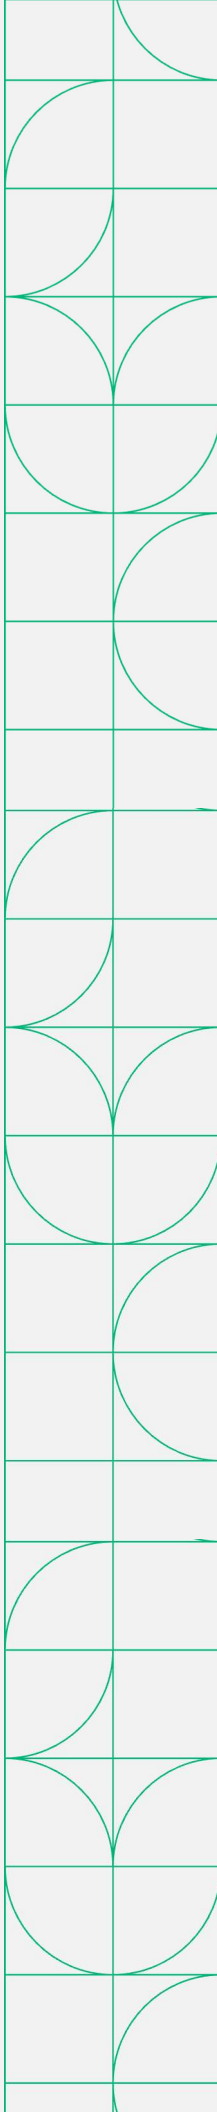

CompactDAQ Sound and Vibration Bundle

In-Box Components

cDAQ-SV1100 Bundle System P/N: 865665-01



NI-9231
(Sound and Vibration Module)




cDAQ-9171
(1-Slot CompactDAQ Chassis)



USB Cable
(USB-A to USB-B)

Recommended Software

FlexLogger

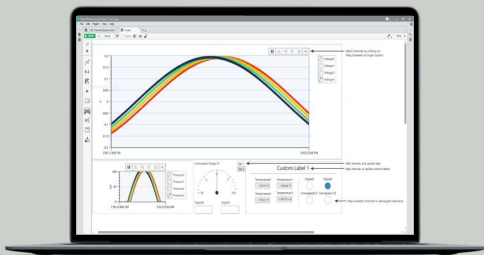

P/N: 785748-3501

- No code software that accelerates measurement configuration and logging with NI DAQ Hardware.
- Acquire data and log test results to .tdms or .csv files
 - Inline calculations for simple math, filtering, Boolean logic, and more
 - Integrated TDMS Viewer for interactive data review

Table of Contents

This document combines the PDFs of this system together. The page numbers in the table of contents correspond to the page number of PDF the component’s documentation begins.

| | |
|-------------------------------|----|
| cDAQ-9171 Specifications..... | 3 |
| NI-9231 Specifications..... | 13 |

cDAQ-9171

Specifications



DEVICE SPECIFICATIONS

NI cDAQTM-9171

NI CompactDAQ One-Slot Bus-Powered USB Chassis

These specifications are for the NI cDAQ-9171 chassis only. These specifications are typical at 25 °C unless otherwise noted. For the C Series module specifications, refer to the documentation for the C Series module you are using.

Analog Input

| | |
|----------------------------------|-----------------------------------|
| Input FIFO size | 127 samples |
| Maximum sample rate ¹ | Determined by the C Series module |
| Timing accuracy ² | 50 ppm of sample rate |
| Timing resolution ² | 12.5 ns |
| Number of channels supported | Determined by the C Series module |

Analog Output

| | |
|-----------------------------------|-------------------------------------|
| Number of channels supported | |
| Hardware-timed task | |
| Onboard regeneration | 16 |
| Non-regeneration | Determined by the C Series module |
| Non-hardware-timed task | |
| Determined by the C Series module | |
| Maximum update rate | |
| Onboard regeneration | 1.6 MS/s (multi-channel, aggregate) |
| Non-regeneration | Determined by the C Series module |

¹ Performance dependent on type of installed C Series module and number of channels in the task.

² Does not include group delay. For more information, refer to the documentation for each C Series module.

| | |
|----------------------|--|
| Timing accuracy | 50 ppm of sample rate |
| Timing resolution | 12.5 ns |
| Output FIFO size | |
| Onboard regeneration | 8,191 samples shared among channels used |
| Non-regeneration | 127 samples |
| AO waveform modes | Non-periodic waveform, periodic waveform regeneration mode from onboard memory, periodic waveform regeneration from host buffer including dynamic update |

Digital Waveform Characteristics

| | |
|---------------------------------------|------------------|
| Waveform acquisition (DI) FIFO | |
| Parallel modules | 511 samples |
| Serial modules | 63 samples |
| Waveform generation (DO) FIFO | |
| Parallel modules | 2,047 samples |
| Serial modules | 63 samples |
| Digital input sample clock frequency | |
| Streaming to application memory | System-dependent |
| Finite | 0 MHz to 10 MHz |
| Digital output sample clock frequency | |
| Streaming from application memory | System-dependent |
| Regeneration from FIFO | 0 MHz to 10 MHz |
| Finite | 0 MHz to 10 MHz |
| Timing accuracy | 50 ppm |

General-Purpose Counters/Timers

| | |
|---------------------------|--|
| Number of counters/timers | 4 |
| Resolution | 32 bits |
| Counter measurements | Edge counting, pulse, semi-period, period, two-edge separation, pulse width |
| Position measurements | X1, X2, X4 quadrature encoding with Channel Z reloading; two-pulse encoding |

| | |
|-------------------------------|---|
| Output applications | Pulse, pulse train with dynamic updates, frequency division, equivalent time sampling |
| Internal base clocks | 80 MHz, 20 MHz, 100 kHz |
| External base clock frequency | 0 MHz to 20 MHz |
| Base clock accuracy | 50 ppm |
| Output frequency | 0 MHz to 20 MHz |
| Inputs | Gate, Source, HW_Arm, Aux, A, B, Z, Up_Down |
| Routing options for inputs | Any module PFI, analog trigger, many internal signals |
| FIFO | Dedicated 127-sample FIFO |

Frequency Generator

| | |
|---------------------|-------------------------|
| Number of channels | 1 |
| Base clocks | 20 MHz, 10 MHz, 100 kHz |
| Divisors | 1 to 16 (integers) |
| Base clock accuracy | 50 ppm |
| Output | Any module PFI terminal |

Module PFI Characteristics

| | |
|------------------------------------|---|
| Functionality | Static digital input, static digital output, timing input, and timing output |
| Timing output sources ³ | Many analog input, analog output, counter, digital input, and digital output timing signals |
| Timing input frequency | 0 MHz to 20 MHz |
| Timing output frequency | 0 MHz to 20 MHz |

Digital Triggers

| | |
|----------|--------------------------------------|
| Source | Any module PFI terminal |
| Polarity | Software-selectable for most signals |

³ Actual available signals are dependent on type of installed C Series module.

| | |
|------------------------|--|
| Analog input function | Start Trigger, Reference Trigger, Pause Trigger, Sample Clock, Sample Clock Timebase |
| Analog output function | Start Trigger, Pause Trigger, Sample Clock, Sample Clock Timebase |
| Counter/timer function | Gate, Source, HW_Arm, Aux, A, B, Z, Up_Down |

Module I/O States

| | |
|-------------|--|
| At power-on | Module-dependent. Refer to the documentation for each C Series module. |
|-------------|--|



Note The NI cDAQ-9171 may revert the input/output of the modules to their power-on state when the USB cable is removed.

Bus Interface

| | |
|-------------------------------|---|
| USB specification | USB 2.0 Hi-Speed |
| High-performance data streams | 6 |
| Data stream types available | Analog input, analog output, digital input, digital output, counter/timer input, counter/timer output, NI-XNET ⁴ |



Note If you are connecting the NI cDAQ-9171 to a USB hub, the hub must be externally powered.

Power Requirements



Caution The protection provided by the NI cDAQ-9171 chassis can be impaired if it is used in a manner not described in this document.



Note Some C Series modules have additional power requirements. For more information about C Series module power requirements, refer to the documentation for each C Series module.

⁴ When a session is active, CAN or LIN (NI-XNET) C Series modules use a total of two data streams regardless of the number of NI-XNET modules in the chassis.



Note Sleep mode for C Series modules is not supported in the NI cDAQ-9171.


| | |
|----------------------------|---------------------|
| Power consumption from USB | 5 V, 500 mA maximum |
| Suspend mode | 2.5 mA maximum |

Physical Characteristics

| | |
|--------------------------|---|
| Weight (unloaded) | 353 g (12.5 oz) |
| Dimensions (unloaded) | 131.4 mm × 88.6 mm × 33.3 mm (5.17 in. × 3.49 in. × 1.31 in.) Refer to the following figure. |
| USB connector securement | |
| USB securement type | JackscREW provided on locking USB cable (part number 198506-01 or 780534-01) |
| Torque for jackscrew | 0.41 N · m (3.6 lb · in.) |
| Chassis ground | |
| Gauge | 1.31 mm ² (16 AWG) or larger wire |
| Torque for ground screw | 0.76 N · m (6.7 lb · in.) |

If you need to clean the chassis, wipe it with a dry towel.

Figure 1. NI cDAQ-9171 Dimensions

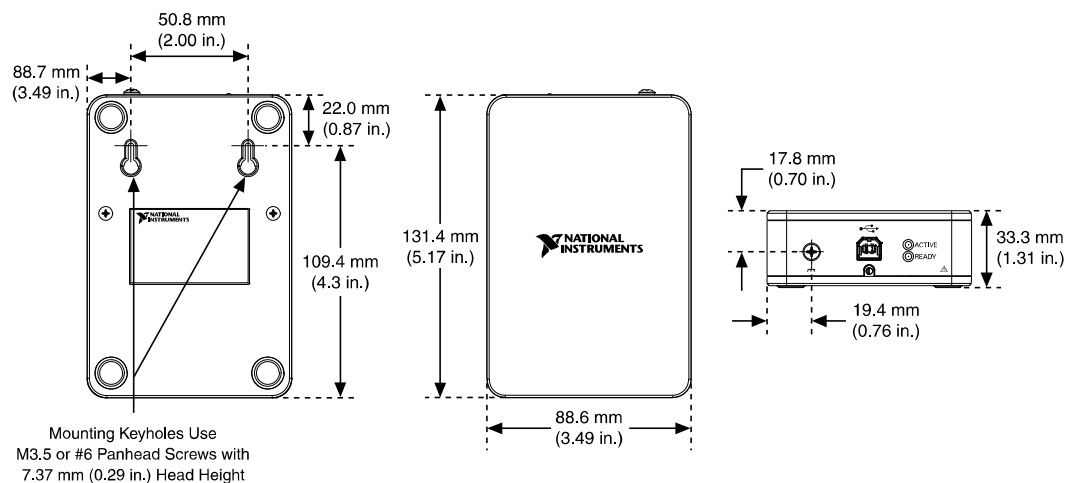

Environmental

| | |
|---|------------------------------|
| Operating temperature (IEC-60068-2-1 and IEC-60068-2-2) | -20 °C to 55 °C |
| Storage temperature (IEC-60068-2-1 and IEC-60068-2-2) | -40 °C to 85 °C |
| Operating humidity (IEC-60068-2-56) | 10% to 90% RH, noncondensing |
| Storage humidity (IEC-60068-2-56) | 5% to 95% RH, noncondensing |
| Pollution Degree (IEC 60664) | 2 |
| Maximum altitude | 5,000 m |

Indoor use only.

Hazardous Locations

| | |
|---|---|
| U.S. (UL) | Class I, Division 2, Groups A, B, C, D, T4; Class I, Zone 2, AEx nA IIC T4 |
| Canada (C-UL) | Class I, Division 2, Groups A, B, C, D, T4; Class I, Zone 2, Ex nA IIC T4 |
| Europe (ATEX) and International (IECEX) | Ex nA IIC T4 Gc |

Shock and Vibration

To meet these specifications, you must panel mount the NI cDAQ-9171 system, use an NI locking USB cable, and affix ferrules to the ends of the terminal lines.

| | |
|-------------------|--|
| Operational shock | 30 g peak, half-sine, 11 ms pulse (Tested in accordance with IEC 60068-2-27. Test profile developed in accordance with MIL-PRF-28800F.) |
| Random vibration | |
| Operating | 5 Hz to 500 Hz, 0.3 g _{rms} |
| Non-operating | 5 Hz to 500 Hz, 2.4 g _{rms} (Tested in accordance with IEC 60068-2-64. Non-operating test profile exceeds the requirements of MIL PRF-28800F, Class 3.) |

Safety and Hazardous Locations Standards

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA 61010-1
- EN 60079-0:2012, EN 60079-15:2010
- IEC 60079-0: Ed 6, IEC 60079-15; Ed 4
- UL 60079-0; Ed 6, UL 60079-15; Ed 4
- CSA 60079-0:2011, CSA 60079-15:2012



Note For UL and other safety certifications, refer to the product label or the [Online Product Certification](#) section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- EN 55022 (CISPR 22): Class A emissions
- EN 55024 (CISPR 24): Immunity
- AS/NZS CISPR 11: Group 1, Class A emissions
- AS/NZS CISPR 22: Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia and New Zealand (per CISPR 11) Class A equipment is intended for use only in heavy-industrial locations.



Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



Note For EMC declarations and certifications, and additional information, refer to the [Online Product Certification](#) section.

CE Compliance C E

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)
- 2014/34/EU; Potentially Explosive Atmospheres (ATEX)

Online Product Certification

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for this product, visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)



EU Customers At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit ni.com/environment/weee.

电子信息产品污染控制管理办法（中国 RoHS）




中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 ni.com/environment/rohs_china。(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)

Refer to the *NI Trademarks and Logo Guidelines* at ni.com/trademarks for information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at ni.com/patents. You can find information about end-user license agreements (EULAs) and third-party legal notices in the readme file for your NI product. Refer to the *Export Compliance Information* at ni.com/legal/export-compliance for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2013—2016 National Instruments. All rights reserved.

NI-9231


DataSheet

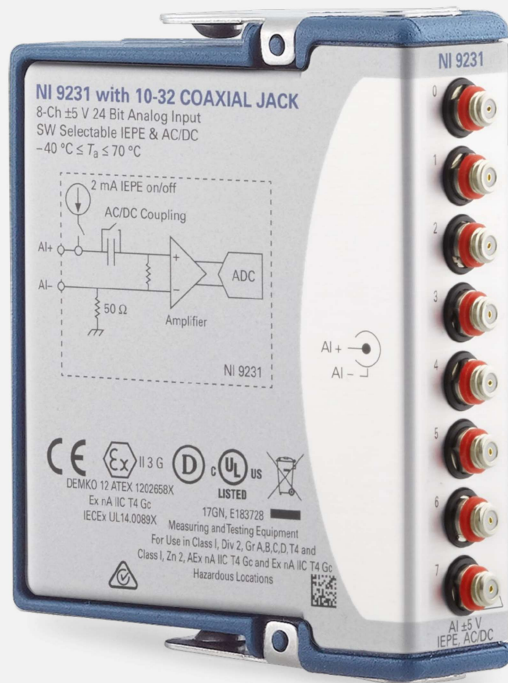

DATASHEET



NI 9231

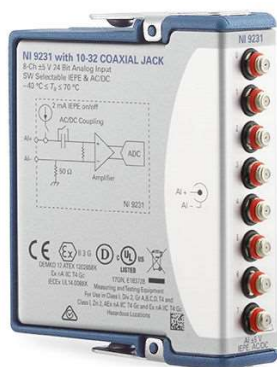8 AI, ± 5 V, 24 Bit, 51.2 kS/s/ch Simultaneous, AC/DC Coupling, IEPE AC Coupling



- 107 dB dynamic range at 51.2 kS/s
- $<16 \mu\text{Vrms}$ noise
- IEPE Open/Short Detection
- Smart TEDS sensor compatibility
- Software-selectable IEPE signal conditioning
- Software-selectable AC/DC coupling
- 10-32 coaxial jack connectivity

The NI 9231 is a 8-channel analog input module for CompactDAQ and CompactRIO with a 51.2 kS/s update rate, 24-bit resolution, and ± 5 V input range. Channels on the NI 9231 allow for high dynamic range measurements necessary to fully utilize modern measurement microphones and accelerometers. In addition, the module includes built-in anti-aliasing filters that automatically adjust to your sampling rate. The NI 9231 incorporates both a TEDS input path and 2 mA of IEPE signal excitation source that can be turned on and off, therefore removing the need for external sensor power and reducing the complexity of the data acquisition system.

| | |
|---|---|
|  | Kit Contents <ul style="list-style-type: none">• NI 9231• NI 9231 Getting Started Guide |
|  | Target Applications <ul style="list-style-type: none">• Audio Testing• Noise, Vibrations, and Harshness (NVH) |

NI C Series Overview



NI provides more than 100 C Series modules for measurement, control, and communication applications. C Series modules can connect to any sensor or bus and allow for high-accuracy measurements that meet the demands of advanced data acquisition and control applications.

- Measurement-specific signal conditioning that connects to an array of sensors and signals
- Isolation options such as bank-to-bank, channel-to-channel, and channel-to-earth ground
- -40 °C to 70 °C temperature range to meet a variety of application and environmental needs
- Hot-swappable

The majority of C Series modules are supported in both CompactRIO and CompactDAQ platforms and you can move modules from one platform to the other with no modification.

CompactRIO



CompactRIO combines an open-embedded architecture with small size, extreme ruggedness, and C Series modules in a platform powered by the NI LabVIEW reconfigurable I/O (RIO) architecture. Each system contains an FPGA for custom timing, triggering, and processing with a wide array of available modular I/O to meet any embedded application requirement.


CompactDAQ

CompactDAQ is a portable, rugged data acquisition platform that integrates connectivity, data acquisition, and signal conditioning into modular I/O for directly interfacing to any sensor or signal. Using CompactDAQ with LabVIEW, you can easily customize how you acquire, analyze, visualize, and manage your measurement data.




Software

LabVIEW Professional Development System for Windows




- Use advanced software tools for large project development
- Generate code automatically using DAQ Assistant and Instrument I/O Assistant
- Use advanced measurement analysis and digital signal processing
- Take advantage of open connectivity with DLLs, ActiveX, and .NET objects
- Build DLLs, executables, and MSI installers

NI LabVIEW FPGA Module




- Design FPGA applications for NI RIO hardware
- Program with the same graphical environment used for desktop and real-time applications
- Execute control algorithms with loop rates up to 300 MHz
- Implement custom timing and triggering logic, digital protocols, and DSP algorithms
- Incorporate existing HDL code and third-party IP including Xilinx IP generator functions
- Purchase as part of the LabVIEW Embedded Control and Monitoring Suite

NI LabVIEW Real-Time Module



- Design deterministic real-time applications with LabVIEW graphical programming
- Download to dedicated NI or third-party hardware for reliable execution and a wide selection of I/O
- Take advantage of built-in PID control, signal processing, and analysis functions
- Automatically take advantage of multicore CPUs or set processor affinity manually
- Take advantage of real-time OS, development and debugging support, and board support
- Purchase individually or as part of a LabVIEW suite

NI 9231 Circuitry

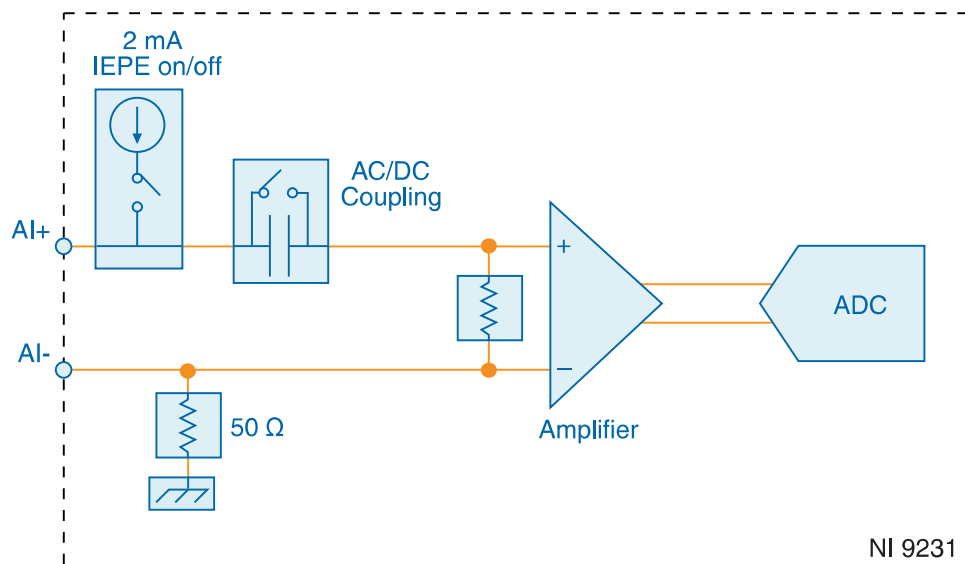

- Input signals on each channel are buffered, conditioned, and then sampled by an ADC.
- Each AI channel provides an independent signal path to the ADC, enabling you to sample all channels simultaneously.
- AI channels are referenced to earth ground through a protected 50 Ω resistor.
- AC/DC coupling is software-selectable.
- IEPE excitation current is software-selectable.
- The module protects each channel from overvoltages.



Note The NI 9231 also has TEDS circuitry. For more information about TEDS, visit ni.com/info and enter the Info Code `rdteds`.

Filtering


The NI 9231 uses a combination of analog and digital filtering to provide an accurate representation of in-band signals and reject out-of-band signals. The filters discriminate between signals based on the frequency range, or bandwidth, of the signal. The three important bandwidths to consider are the passband, the stopband, and the anti-imaging bandwidth.

The NI 9231 represents signals within the passband, as quantified primarily by passband ripple and phase nonlinearity. All signals that appear in the alias-free bandwidth are either unaliased signals or signals that have been filtered by at least the amount of the stopband rejection.

Passband

The signals within the passband have frequency-dependent gain or attenuation. The small amount of variation in gain with respect to frequency is called the passband flatness. The digital filters of the NI 9231 adjust the frequency range of the passband to match the data rate. Therefore, the amount of gain or attenuation at a given frequency depends on the data rate.

Figure 1. Typical Passband Flatness in DC Coupling for the NI 9231 at the Maximum Data Rate

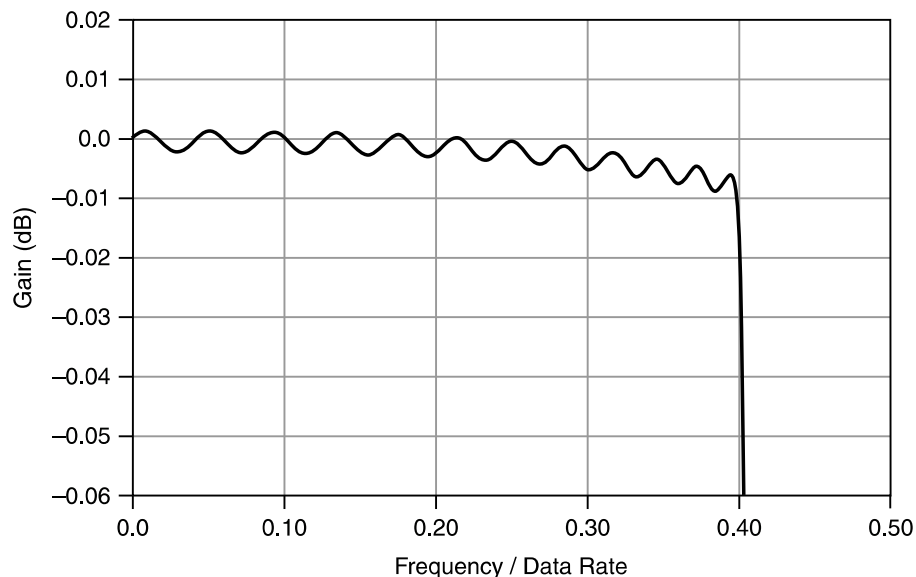

Note The passband flatness improves at lower sample rates compared to the graph.

Stopband

The filter significantly attenuates all signals above the stopband frequency. The primary goal of the filter is to prevent aliasing. Therefore, the stopband frequency scales precisely with the data rate. The stopband rejection is the minimum amount of attenuation applied by the filter to all signals with frequencies within the stopband.

Alias-Free Bandwidth

Any signals that appear in the alias-free bandwidth are not aliased artifacts of signals at a higher frequency. The alias-free bandwidth is defined by the ability of the filter to reject frequencies above the stopband frequency. The alias-free bandwidth is equal to the data rate minus the stopband frequency.

Data Rates

The frequency of a master timebase (f_M) controls the data rate (f_s) of the NI 9231. The NI 9231 includes an internal master timebase with a frequency of 13.1072 MHz. Using the internal master timebase of 13.1072 MHz results in data rates of 51.2 kS/s, 34.133 kS/s, 25.6 kS/s, 17.067 kS/s, and so on down to 267 S/s, depending on the decimation rate and the value of the clock divider. However, the data rate must remain within the appropriate data rate range.

The following equation provides the available data rates of the NI 9231:

$$f_s = \frac{f_M}{4 \times a \times b}$$

where

- a is the decimation rate (32, 64, 128, 256, 512, 1024), and b is the clock divider (integer between 1 and 12).
- when the value of b is 1, the value of a can be 64, 128, 256, 512, or 1024.
- when the value of b is between 2 and 12, the value of a can be 32, 64, 128, 256, 512, or 1024.



Note

$$\frac{f_M}{b}$$

must be greater than or equal to 1 MHz.

There are multiple combinations of clock dividers and decimation rates that yield the same data rate. The software always picks the highest decimation rate for the selected data rate for better noise performance. The following table lists available data rates with the internal master timebase.

Table 1. Available Data Rates with the Internal Master Timebase

| f_s (kS/s) | Decimation Rate | Clock Divider |
|--------------|-----------------|---------------|
| 51.200 | 64 | 1 |
| 34.133 | 32 | 3 |
| 25.600 | 128 | 1 |
| 20.480 | 32 | 5 |
| 17.067 | 64 | 3 |
| 14.629 | 32 | 7 |
| 12.800 | 256 | 1 |
| 11.378 | 32 | 9 |
| 10.240 | 64 | 5 |
| 9.309 | 32 | 11 |
| 8.533 | 128 | 3 |
| 7.314 | 64 | 7 |
| 6.400 | 512 | 1 |
| 5.689 | 64 | 9 |

Table 1. Available Data Rates with the Internal Master Timebase (Continued)

| f_s (kS/s) | Decimation Rate | Clock Divider |
|--------------|-----------------|---------------|
| 5.120 | 128 | 5 |
| 4.655 | 64 | 11 |
| 4.267 | 256 | 3 |
| 3.657 | 128 | 7 |
| 3.200 | 1024 | 1 |
| 2.844 | 128 | 9 |
| 2.560 | 256 | 5 |
| 2.327 | 128 | 11 |
| 2.133 | 512 | 3 |
| 1.829 | 256 | 7 |
| 1.600 | 1024 | 2 |
| 1.422 | 256 | 9 |
| 1.280 | 512 | 5 |
| 1.164 | 256 | 11 |
| 1.067 | 1024 | 3 |
| 0.914 | 512 | 7 |
| 0.800 | 1024 | 4 |
| 0.711 | 512 | 9 |
| 0.640 | 1024 | 5 |
| 0.582 | 512 | 11 |
| 0.533 | 1024 | 6 |
| 0.457 | 1024 | 7 |
| 0.400 | 1024 | 8 |
| 0.356 | 1024 | 9 |
| 0.320 | 1024 | 10 |
| 0.291 | 1024 | 11 |
| 0.267 | 1024 | 12 |

The NI 9231 also can accept an external master timebase or export its own master timebase. To synchronize the data rate of an NI 9231 with other modules that use master timebases to control sampling, all of the modules must share a single master timebase source. When using an external timebase with a frequency other than 13.1072 MHz, the NI 9231 has a different set of data rates. Refer to the software help for information about configuring the master timebase source for the NI 9231.



Note The cRIO-9151 R Series Expansion chassis does not support sharing timebases between modules.



Note The cRIO-9151 R Series Expansion chassis has different maximum data rates from the CompactRIO and CompactDAQ chassis. Refer to the [Input Characteristics](#) on page 8 section for detailed information.

NI 9231 Specifications

The following specifications are typical for the range -40 °C to 70 °C unless otherwise noted.



Caution Observe all instructions and cautions in the user documentation. Using the model in a manner not specified can damage the model and compromise the built-in safety protection. Return damaged models to NI for repair.



Attention Suivez toutes les instructions et respectez toutes les mises en garde de la documentation utilisateur. L'utilisation d'un modèle de toute autre façon que celle spécifiée risque de l'endommager et de compromettre la protection de sécurité intégrée. Renvoyez les modèles endommagés à NI pour réparation.

Definitions

Warranted specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

Characteristics describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- *Typical* specifications describe the performance met by a majority of models.
- *Nominal* specifications describe an attribute that is based on design, conformance testing, or supplemental testing.

Specifications are *Typical* unless otherwise noted.

Input Characteristics

| | |
|--------------------|--------------------------------------|
| Number of channels | 8 analog input channels |
| ADC resolution | 24 bits |
| Type of ADC | Delta-Sigma with analog prefiltering |
| Sampling mode | Simultaneous |

| | |
|---|---|
| Input coupling | Software-selectable AC/DC |
| Type of TEDS supported | IEEE 1451.4 TEDS Class I |
| TEDS capacitive drive | 5,000 pF |
| Internal master timebase (f_M) | |
| Frequency | 13.1072 MHz |
| Accuracy | ±100 ppm maximum |
| CompactRIO & CompactDAQ chassis data rate range (f_s) | |
| Using internal master timebase | |
| Minimum | 267 S/s |
| Maximum | 51.2 kS/s |
| Using external master timebase | |
| Minimum | 244.141 S/s |
| Maximum | 51.367 kS/s |
| R Series Expansion chassis data rate range (f_s) | |
| Using internal master timebase | |
| Minimum | 267 S/s |
| Maximum | 25.6 kS/s |
| Using external master timebase | |
| Minimum | 244.141 S/s |
| Maximum | 25.684 kS/s |
| Data rate | $f_s = \frac{f_M}{4 \times a \times b}$ |
| Input delay | $34/f_s + 3.0 \mu\text{s}$ |
| Overvoltage protection | ±30 V maximum on one channel at a time |
| Input impedance | |
| AI+ to chassis | 918 kΩ 135 pF |
| AI- to chassis | 50 Ω |
| Input voltage range | |
| Minimum | ±5 Vpk |
| Typical | ±5.1 Vpk |
| Scaling coefficient | 610,715 pV/LSB |

Maximum input voltage

| | |
|---------------|-----------------------|
| AI+ to Ground | ±5.16 V _{pk} |
| AI- to Ground | +0.7 V/-0.2 V |

IEPE excitation current (software-selectable on/off)

| | |
|---------|---------|
| Minimum | 2 mA |
| Typical | 2.09 mA |

IEPE excitation noise 75 nArms at 51.2 kS/s

IEPE compliance voltage¹ 19 V maximum


IEPE Diagnostic Feature

| | |
|-------------------------|-----------------------|
| Open Loop Detection | IEPE Current, <2 mA |
| Short Circuit Detection | AI+ to Ground, <1.2 V |

High pass filter cutoff frequency (AC)

| | |
|---------|--------|
| -3 dB | 1.2 Hz |
| -0.1 dB | 7.9 Hz |

Figure 2. High Pass Filter Frequency Response

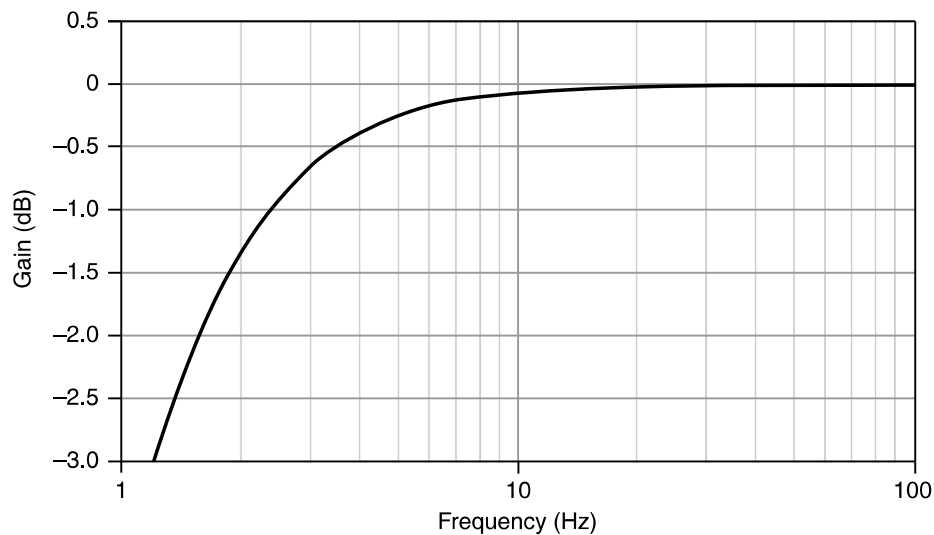

¹ If you are using an IEPE sensor, use the following equation to make sure your configuration meets the IEPE compliance voltage range.

$(V_{\text{common-mode}} + V_{\text{bias}} \pm V_{\text{full-scale}})$ must be 0 V to 19 V

where

$V_{\text{common-mode}}$ is the common-mode voltage applied to the NI 9231

V_{bias} is the bias voltage of the IEPE sensor

$V_{\text{full-scale}}$ is the full-scale voltage of the IEPE sensor

Table 2. Accuracy in DC Coupling

| Measurement Conditions | Percent of Reading (Gain Error) | Percent of Range ² (Offset Error) |
|---------------------------|------------------------------------|---|
| Maximum (-40 °C to 70 °C) | ±0.220% | ±0.075% |
| Typical (23 °C, ±5 °C) | ±0.039% | ±0.016% |

Offset error (AC coupling) ±0.151%, maximum

Stability of Accuracy

Gain drift 3.7 ppm/°C; 22.4 ppm/°C, maximum

Offset drift 8.6 µV/°C; 34.8 µV/°C, maximum

Passband, -0.1 dB

Frequency $0.4 * f_s$

Flatness (peak-to-peak), DC to 20 kHz 0.035 dB, maximum

Phase linearity

DC coupling, DC to 20 kHz 0.06°, maximum

Channel-to-channel mismatch

Gain, DC to 20 kHz 0.123 dB, maximum

Phase (f_{in} in kHz) $f_{in} * 0.058^\circ$, maximum

Stopband

Frequency $0.499 * f_s$

Rejection 105 dB

Alias free bandwidth

$0.5 * f_s$

Alias rejection, at 2x oversample rate

$f_s = 51.2$ kS/s 91 dB at 6.5536 MHz

$f_s = 267$ S/s 35 dB at 546 kHz

² Range equals 5 Vpk

Table 3. Idle Channel Noise

| Data Rate (S/s) | Decimation Rate | AC or DC Coupling (μVrms) | Spectral Noise Density ($\text{nV}/\sqrt{\text{Hz}}$) at 1 kHz |
|-----------------|-----------------|---|---|
| 51,200 | 64 | 15.5 | 104 |
| 34,133 | 32 | 19.4 | 159 |
| 25,600 | 128 | 10.9 | 104 |
| 12,800 | 256 | 7.8 | 103 |
| 6,400 | 512 | 5.6 | 103 |
| 3,200 | 1,024 | 4.1 | 103 |



Note The noise specifications assume the NI 9231 is using the internal master timebase frequency of 13.1072 MHz.

Table 4. Dynamic Range (At 1 kHz Input Frequency, -60 dBFS amplitude, $\text{BW}=0.5 * f_s$)

| Data Rate (S/s) | Decimation Rate | AC or DC Coupled (dBFS) |
|-----------------|-----------------|-------------------------|
| 51,200 | 64 | 107 |
| 34,133 | 32 | 105 |
| 25,600 | 128 | 110 |
| 12,800 | 256 | 113 |
| 6,400 | 512 | 116 |
| 3,200 | 1,024 | 119 |

Crosstalk (CH to CH)

| | |
|--|---------------|
| $f_{\text{in}} \leq 1 \text{ kHz}$ | -116 dB |
| $f_{\text{in}} \leq 10 \text{ kHz}$ | -99 dB |
| CMRR, $f_{\text{in}} \leq 1 \text{ kHz}$ | 45 dB minimum |

Table 5. Total Harmonic Distortion (THD) at 51.2 kS/s

| Input Amplitude | 1 kHz | 10 kHz |
|-----------------|----------|---------|
| -1 dBFS | -103 dBc | -83 dBc |
| -10.97 dBFS | -107 dBc | -88 dBc |

Intermodulation distortion (IMD)³

| | |
|--------------------------------|----------|
| DIN 250 Hz + 8 kHz | -89 dB |
| CCIF 14 kHz + 15 kHz | -79 dB |
| Non-harmonic SFDR ⁴ | 133 dBFS |

Power Requirements

Power consumption from chassis

| | |
|-------------|--------------------|
| Active mode | 1.00 W maximum |
| Sleep mode | 53 μ W maximum |

Thermal dissipation (at 70 °C)

| | |
|-------------|----------------|
| Active mode | 1.40 W maximum |
| Sleep mode | 0.13 W maximum |

Physical Characteristics

If you need to clean the module, wipe it with a dry towel.



Tip For two-dimensional drawings and three-dimensional models of the C Series module and connectors, visit ni.com/dimensions and search by module number.

Weight 164 g (5.8 oz)

NI 9231 with 10-32 Coaxial Jack Safety Voltages

Connect only voltages that are within the following limits:

Channel-to-earth ground ± 30 V maximum, Measurement Category I

³ Test standards:

- DIN 250 Hz + 8 kHz, amplitude ratio 4:1 with total amplitude at 0 dBFS
- CCIF 14 kHz + 15 kHz, amplitude ratio 1:1 with each tone amplitude at -6 dBFS

Up to fifth order harmonic

⁴ Tested with 1 kHz -60 dBFS input at 51.2 kS/s

Isolation

| | |
|-------------------------|------|
| Channel-to-channel | None |
| Channel-to-earth ground | None |



Caution Do not connect the NI 9231 to signals or use for measurements within Measurement Categories II, III, or IV.



Attention Ne connectez pas le NI 9231 à des signaux et ne l'utilisez pas pour effectuer des mesures dans les catégories de mesure II, III ou IV.

Measurement Category I is for measurements performed on circuits not directly connected to the electrical distribution system referred to as *MAINS* voltage. MAINS is a hazardous live electrical supply system that powers equipment. This category is for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics.



Note Measurement Categories CAT I and CAT O are equivalent. These test and measurement circuits are for other circuits not intended for direct connection to the MAINS building installations of Measurement Categories CAT II, CAT III, or CAT IV.

Hazardous Locations

| | |
|---|--|
| U.S. (UL) | Class I, Division 2, Groups A, B, C, D, T4; Class I, Zone 2, AEx nA IIC T4 Gc |
| Canada (C-UL) | Class I, Division 2, Groups A, B, C, D, T4; Ex nA IIC T4 Gc |
| Europe (ATEX) and International (IECEx) | Ex nA IIC T4 Gc |

Safety Compliance and Hazardous Locations Standards

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA C22.2 No. 61010-1
- EN 60079-0:2012, EN 60079-15:2010
- IEC 60079-0: Ed 6, IEC 60079-15; Ed 4
- UL 60079-0; Ed 6, UL 60079-15; Ed 4
- CSA C22.2 No. 60079-0, CSA C22.2 No. 60079-15



Note For UL and other safety certifications, refer to the product label or the [Product Certifications and Declarations](#) section.

Electromagnetic Compatibility Standards

This product meets the requirements of the following EMC standards for sensitive electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Industrial immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia and New Zealand (per CISPR 11) Class A equipment is intended for use only in heavy-industrial locations.



Note For EMC declarations and certifications, and additional information, refer to the [Online Product Certification](#) section.



Notice Conducted RF interference on the I/O ports of the NI 9231 can adversely affect its measurement accuracy.

CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)
- 2014/34/EU; Potentially Explosive Atmospheres (ATEX)

Product Certifications and Declarations

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for NI products, visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

Shock and Vibration

To meet these specifications, you must panel mount the system.

| | |
|---------------------|---|
| Operating vibration | |
| Random | 5 g _{rms} , 10 Hz to 500 Hz |
| Sinusoidal | 5 g, 10 Hz to 500 Hz |
| Operating shock | 30 g, 11 ms half sine; 50 g, 3 ms half sine; 18 shocks at 6 orientations |

Environmental

Refer to the manual for the chassis you are using for more information about meeting these specifications.

| | |
|---|---------------------------------|
| Operating temperature (IEC 60068-2-1, IEC 60068-2-2) | -40 °C to 70 °C |
| Storage temperature (IEC 60068-2-1, IEC 60068-2-2) | -40 °C to 85 °C |
| Ingress protection | IP40 |
| Operating humidity (IEC 60068-2-30) | 10% RH to 90% RH, noncondensing |
| Storage humidity (IEC 60068-2-30) | 5% RH to 95% RH, noncondensing |
| Pollution Degree | 2 |
| Maximum altitude | 5,000 m |

Indoor use only.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)



EU Customers At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit ni.com/environment/weee.

电子信息产品污染控制管理办法（中国 RoHS）



中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 ni.com/environment/rohs_china。（For information about China RoHS compliance, go to ni.com/environment/rohs_china）

Calibration

You can obtain the calibration certificate and information about calibration services for the NI 9231 at ni.com/calibration.

Calibration interval

2 years

Information is subject to change without notice. Refer to the *NI Trademarks and Logo Guidelines* at ni.com/trademarks for information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at ni.com/patents. You can find information about end-user license agreements (EULAs) and third-party legal notices in the readme file for your NI product. Refer to the *Export Compliance Information* at ni.com/legal/export-compliance for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2018 National Instruments. All rights reserved.

378041A-02 May 17, 2018