

Base strip - PCV 4/11-G-7,62 - 1804771

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Header, Nominal current: 20 A, Rated voltage (III/2): 630 V, Number of positions: 11, Pitch: 7.62 mm, Color: green, Contact surface: Tin, Assembly: Soldering, Mounting flange: Accessory Order No. 1827570


The figure shows a 5-pos. version of the product

Product Features

- ✓ PCB-SHIELD shroud for a professional EMC shield connection
- ✓ Vibration-resistant connection by means of separate BF-PC 4 mounting flanges (also for screw connection in the device)
- ✓ PC 4 headers for use in combination with all PC 4 plugs
- ✓ CP-PC RD coding profiles as protection against mismatching



Key commercial data

Packing unit	1 pc
GTIN	 4 017918 046217
Weight per Piece (excluding packing)	24.63 GRM
Custom tariff number	85366990
Country of origin	Germany

Technical data

Dimensions

Length	14.3 mm
Pitch	7.62 mm
Dimension a	76.2 mm
Pin dimensions	1 x 0,8 mm
Hole diameter	1.3 mm

General

Base strip - PCV 4/11-G-7,62 - 1804771

Technical data

General

Range of articles	PCV 4/...-G
Insulating material group	I
Rated surge voltage (III/3)	6 kV
Rated surge voltage (III/2)	6 kV
Rated surge voltage (II/2)	6 kV
Rated voltage (III/3)	400 V
Rated voltage (III/2)	630 V
Rated voltage (II/2)	630 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	20 A
Maximum load current	20 A
Insulating material	PA
Inflammability class according to UL 94	V0
Color	green
Number of positions	11

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002637
ETIM 5.0	EC002637

UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

Base strip - PCV 4/11-G-7,62 - 1804771

Approvals

Approvals


Approvals


CSA / UL Recognized / cUL Recognized / GOST / LR / GL / BV / DNV / RS / GOST / cULus Recognized


Ex Approvals


Approvals submitted

Approval details

CSA 		
	B	C
Nominal current IN	20 A	20 A
Nominal voltage UN	300 V	300 V

UL Recognized 		
	B	C
Nominal current IN	20 A	20 A
Nominal voltage UN	300 V	300 V

cUL Recognized 		
	B	C
Nominal current IN	20 A	20 A
Nominal voltage UN	300 V	300 V

GOST 		
--	--	--

Base strip - PCV 4/11-G-7,62 - 1804771

Approvals

LR	
Nominal current IN	20 A
Nominal voltage UN	400 V

GL	
Nominal current IN	20 A
Nominal voltage UN	400 V

BV	
----	--

DNI	
-----	--


RS	
----	--

GOST	
------	--

cULus Recognized	
------------------	--

Drawings

Drilling diagram

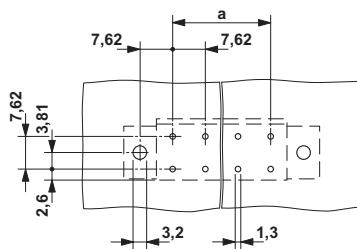

Dimensioned drawing

