



ATC2525ZZ-XXXXJN-99 Features:

- PI Configuration
- Solderable Terminals
- Customer Defined Testing Available
- Symmetrical Design¹
- Tape & Reel or Waffle Pack Available (Standard is bulk)




ATC2525ZZ-XXXXJN-99 Parameters:

Nominal Attenuation Range:	1dB - 10dB
Operating Frequency:	DC - 2GHz*
Attenuation Tolerance:	±0.5dB
Rated Power:	30W**
Return Loss (Typical)*:	19dB or Better
Impedance:	50Ω (47.5Ω Min., 52.5Ω Max.)
Construction:	Thick Film on BeO
Operating Temperature:	-55 to +150°C




¹ Can be mounted in either direction
^{*} In a matched, continuous 50Ω system with proper workmanship
^{**} Rating based on ≤100°C constant baseplate temperature

ATC2525ZZ-XXXXJN-99 Power Derating Curve

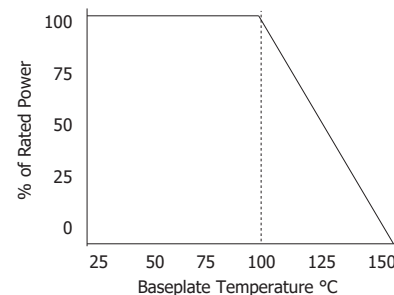

ATC2525ZZ-XXXXJN-99 Dimensions:

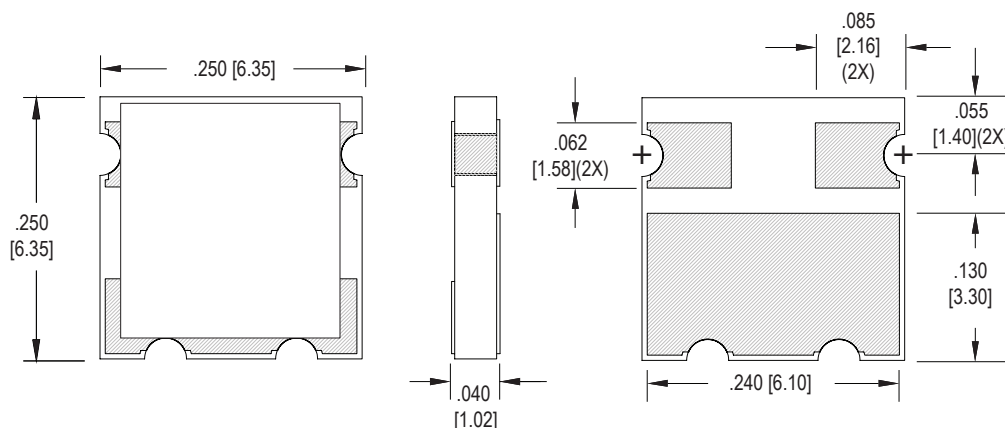

Ordering Information:

ATC	2525	ZZ	-	XXXX	J	N	-	99	UU
Prefix for 3 Sided Wraparound Attenuator w/ Castellations									
Size 2525				Value Code Examples 0100 - 1dB 0500 - 5dB 0200 - 2dB 1000 - 10dB	Tolerance J - 5%	Normal Inspection Contact factory for additional options		Substrate 99 - 0.040" BeO	Packaging Blank - Bulk TR - Tape and Reel WP - Waffle Pack
Terminal Metallization				RoHS	Magnetic	Solder	Epoxy	Wirebond	
CB - SnPb over Nickel over Silver				No	Yes	Yes	No	No	
CT - Matte Tin over Nickel over Silver				Yes	Yes	Yes	No	No	

Barry Industries reserves the right to change part number and/or process without notification.

ATC2525ZZ-XXXXJN-99 Reliability Specifications:

Parameter:	Test Condition:	Results:
Short Time Overload	Apply 1.1x Rated Power for 5 Seconds.	≤ 5.0% Resistance Shift
Rated Load Life	Apply 1/2 Power Under 40°C ±2°C 90 Minutes on/ 30 Minutes off. Repeat for 100 hours	≤ 5.0% Resistance Shift
Moisture Resistance	MIL-PRF-55342 para 4.8.9 95% RH, 25°C - 65°C	≤ 5.0% Resistance Shift
Resistance to Soldering Heat	MIL-STD-202 Method 210 and MIL-PRF-55342 Para 4.8.8.1	≤ 5.0% Resistance Shift
Resistance to Bonding Exposure	MIL-PRF-55342 Para 4.8.8.2	≤ 5.0% Resistance Shift
Solderability	MIL-PRF-55342 Para 4.8.12	>95% Covered
High Temperature Storage	125°C ±2°C for 500 Hours	1.) ≤ 5.0% Resistance Shift 2.) No Significant Abnormality (Visual)
Thermal Shock	-65°C to +150°C 30 Minutes Dwell, 5 Cycles	1.) ≤ 5.0% Resistance Shift 2.) No Significant Abnormality (Visual)

Barry Industries reserves the right to change part number and/or process without notification.