



REV. BW


IN PROCESS 3  
(-T PLATING ONLY)

| TABLE 4 (-T PLATING ONLY) |                                               |       |
|---------------------------|-----------------------------------------------|-------|
| LEAD STYLE                | NUMBER OF BAND MARKS ALLOWED IN THE POST AREA |       |
|                           | PIN A                                         | PIN B |
| *-01                      | 0                                             | 0     |
| *-01-RA                   | 0                                             | 0     |
| *-01-SM                   | 0                                             | 0     |
| *-02                      | 0                                             | 0     |
| *-02-RA                   | 0                                             | 0     |
| *-02-SM                   | 0                                             | 0     |

\* PINS TO BE FLIPPED OPPOSITE OF SELECTIVE PLATING BEFORE BEING INSERTED




IN PROCESS 1



IN PROCESS 2

UNLESS OTHERWISE NOTED  
DIMENSIONS ARE IN INCHES  
TOLERANCES ARE:  
ONE PLACE DECIMALS  $\pm .1$  [2.5] THREE PLACE DECIMALS  $\pm .005$  [.13]  
TWO PLACE DECIMALS  $\pm .01$  [.3] FOUR PLACE DECIMALS  $\pm .0010$  [.025]  
ANGLES  $\pm 1^\circ$

FIG 3  
-SM: SURFACE MOUNT  
DIFFERENT AS SHOWN OTHERWISE SAME AS FIG 1

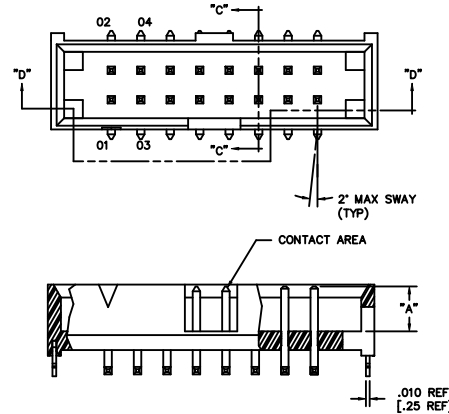



SECTION "D-D"

TITLE:  
2mm C.L. SHROUDED  
TERMINAL STRIP TO  
MATE WITH CABLE

DWG NO:  
STMM-1XX-XX-D-XX-XX-XX-X-XX  
SHEET 2 OF 3

TABLE 2


|               | LEAD STYLE | "A"         | "B" REF    | "C"         | PIN #1         | "L" REF<br>TERMINAL LENGTH |
|---------------|------------|-------------|------------|-------------|----------------|----------------------------|
| SURFACE MOUNT | -01        | .100 [2.54] | .172 [4.4] | .065 [1.65] | T-1S13-07-XX-2 | .302 [7.67]                |
|               | -02        | .120 [3.05] | .173 [4.4] | .085 [2.16] | T-1S13-20-XX-2 | .323 [8.20]                |

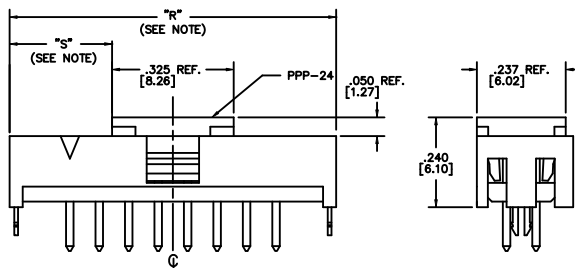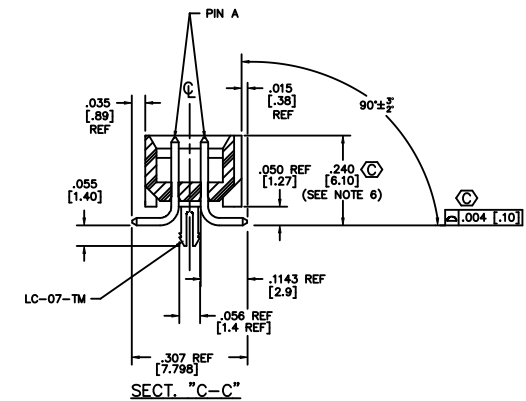

NOTE: "R" = USED MEASURED DIMENSION (REF)  
"S" =  $\{("R" - .325 [8.26]) / 2\} \pm .020 [.51]$


FIG 4  
-P: PICK AND PLACE PAD  
3 POSITION MIN.

DIFFERENT AS SHOWN OTHERWISE SAME AS FIG 1

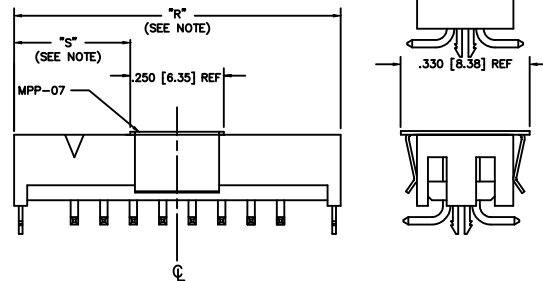

NOTE: "R" = USED MEASURED DIMENSION (REF)  
"S" =  $\{("R" - .250 [6.35]) / 2\} \pm .020 [.51]$

FIG 5  
-M: METAL PICK AND PLACE PAD  
-SM OPTION ONLY, 3 POSITION MIN.  
DIFFERENT AS SHOWN OTHERWISE SAME AS FIG 1

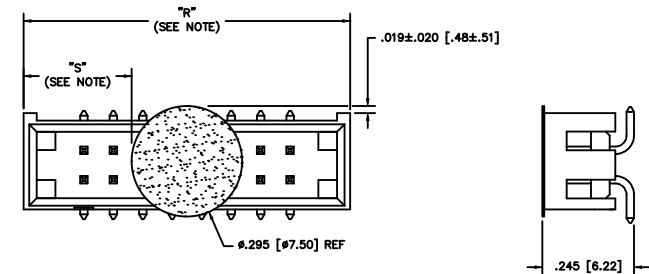

NOTE: "R" = USED MEASURED DIMENSION (REF)  
"S" =  $\{("R" - .295 [7.50]) / 2\} \pm .020 [.51]$

FIG 6  
-K OPTION (POLYIMIDE FILM PAD)

## \* PROPRIETARY NOTE \*

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY, NOR REPRODUCED, TRANSMITTED OR INCORPORATED IN ANY OTHER PROJECT IN ANY FORMER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

EXISPROD \ASSEMBLY\2MM  
STMMASM2

**samtec**

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150  
PHONE (812) 944-6733 P.O. BOX 1147  
CODE 55322

MADE BY: BRATCHER 2-21-94

STMM-1XX-XX-XX-D-XX-XX-XX-X-XX  
SHEET 2 OF 3