
DO NOT SCALE FROM THIS PRINT

## <u>FIG 1</u> LSS-DV TO LSS-DV

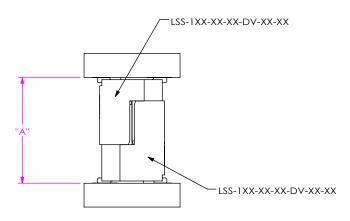

LEAD STYLE	-01		-02		-03		WIPE	
	"A" FULLY MATED	"A" MAX	"A" FULLY MATED	"A" MAX	"A" FULLY MATED	"A" MAX	FULLY MATED	MIN
	MATED		MATED		MATED		MATED	
-01	.240 [6.09]	.288 [7.31]					.063 [1.60]	.015 [0.38]
-02	.358 [9.09]	.406 [10.31]	.476 [12.09]	.524 [13.30]			.063 [1.60]	.015 [0.38]
-03	.279 [7.09]	.327 [8.31]	.397 [10.09]	.445 [11.31]	.318 [8.09]	.366 [9.31]	.063 [1.60]	.015 [0.38]

## NOTES:

- 1. DRAWING ILLUSTRATES EFFECTIVE MATING RANGE OF
- CONNECTORS IN VARIOUS CONFIGURATIONS
  2. ALTHOUGH MAX DIMENSIONS ARE LISTED SAMTEC RECOMMENDS FULLY MATING COMPONENTS.
- 3. ALL DIMENSIONS BASED ON NOMINAL VALUES FOR
- SAMTEC RECOMMENDED PCB LAYOUTS.

  4. FOR APPLICATIONS REQUIRING TWO OR MORE CONNECTORS PER BOARD, CONTACT IPG@SAMTEC.COM.

## PROPRIETARY NOTE

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

